INFRACLIK™

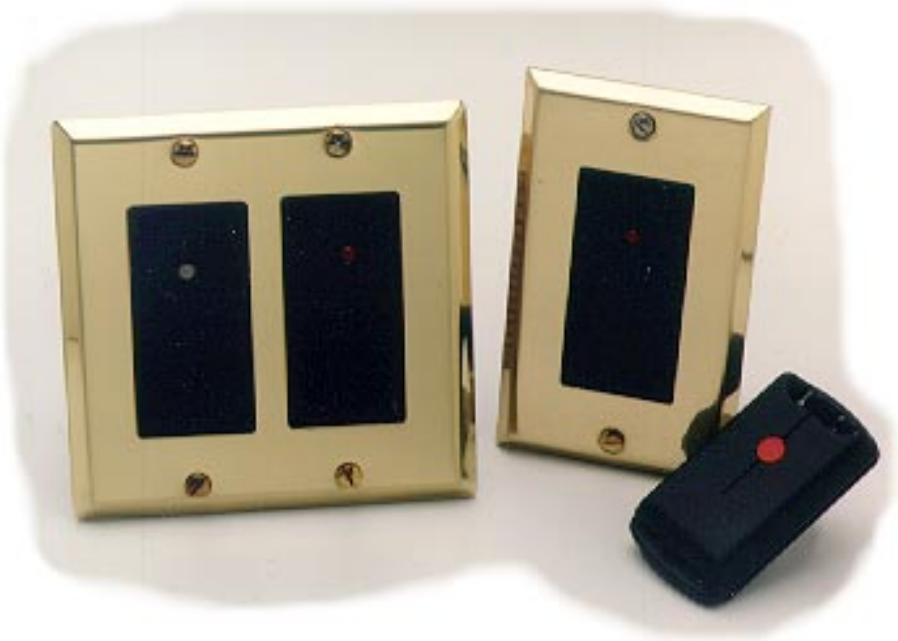

Security is in your hands. . .

with the InfraClik wireless access control system. Wireless access control is the perfect solution where the security of access control is required yet the most convenient method of entry is desired.

viscount

viscount

We Control Doors.

INFRACLIK™

Security is in your hands with the InfraClik infrared remote access control system.

The palm-sized transmitter is a hit -- users will love its ease of operation and added security.

Installation and use is easy. InfraClik receivers mount in a standard single gang electrical box. To use a transmitter you simply point it at the receiver and click the door or gate open.

The InfraClik comes in standard 26 bit wiegand format to interface with any access control system. Proprietary bit formats and numbering systems are also available.

The optional camera module helps management to visually identify visitors and can be particularly effective, for example, in underground parking applications where overhead cameras may be blocked from viewing the driver of a vehicle.

InfraClik transmitters can be especially effective in high security applications where a wireless system is needed but concerns about scanners make radio frequency inappropriate.

FEATURES

- Receivers come in standard 26 bit wiegand format.
- Each transmitter has its own unique code.
- All codes are factory programmed - cannot be compromised!
- 8' to 50' range.
- Individual transmitter codes can be easily added or deleted from any access control system.
- Infrared technology increases security by eliminating the phantom door openings associated with radio frequency systems.
- Confidential proprietary OEM wiegand bit formats available.
- Receivers available in silver, gold or black to match various 'decora' style architectural applications.
- Designed for indoor or outdoor use.

SPECIFICATIONS

Transmitter:

Dimensions:	1.5"w x 2.7"h x 0.6"d
Operating Range:	8' to 50'

Receiver:

Dimensions:	2.75"w x 4.5"h x 1.25"d
Mounting:	Single gang electrical box
Input Power:	12V AC or DC
Receiver Connector:	RJ-45

Camera System:

Dimensions:	4.5"w x 4.5"h x 1.25"d
Mounting:	Double gang electrical box
Input Power:	12V AC or DC
	Camera - see specs.
Receiver Connector:	RJ-45

Camera Specifications:

Call factory for black and white, colour, and night vision options.

Warranty:	Two year factory to dealer limited warranty.

Represented by:

viscount
We Control Doors

For more information or specifications on InfraClik, contact:

Viscount Communication and Control Systems Inc.
4585 Tillicum Street
Burnaby, B.C., Canada V5J 3J9
Telephone: (604) 327-9446 Toll Free: 1-800-476-3774
Facsimile: (604) 327-3859
E-mail: sales@viscount.com Website: http://www.viscount.com